


Ekorooft Tile Installation Pattern

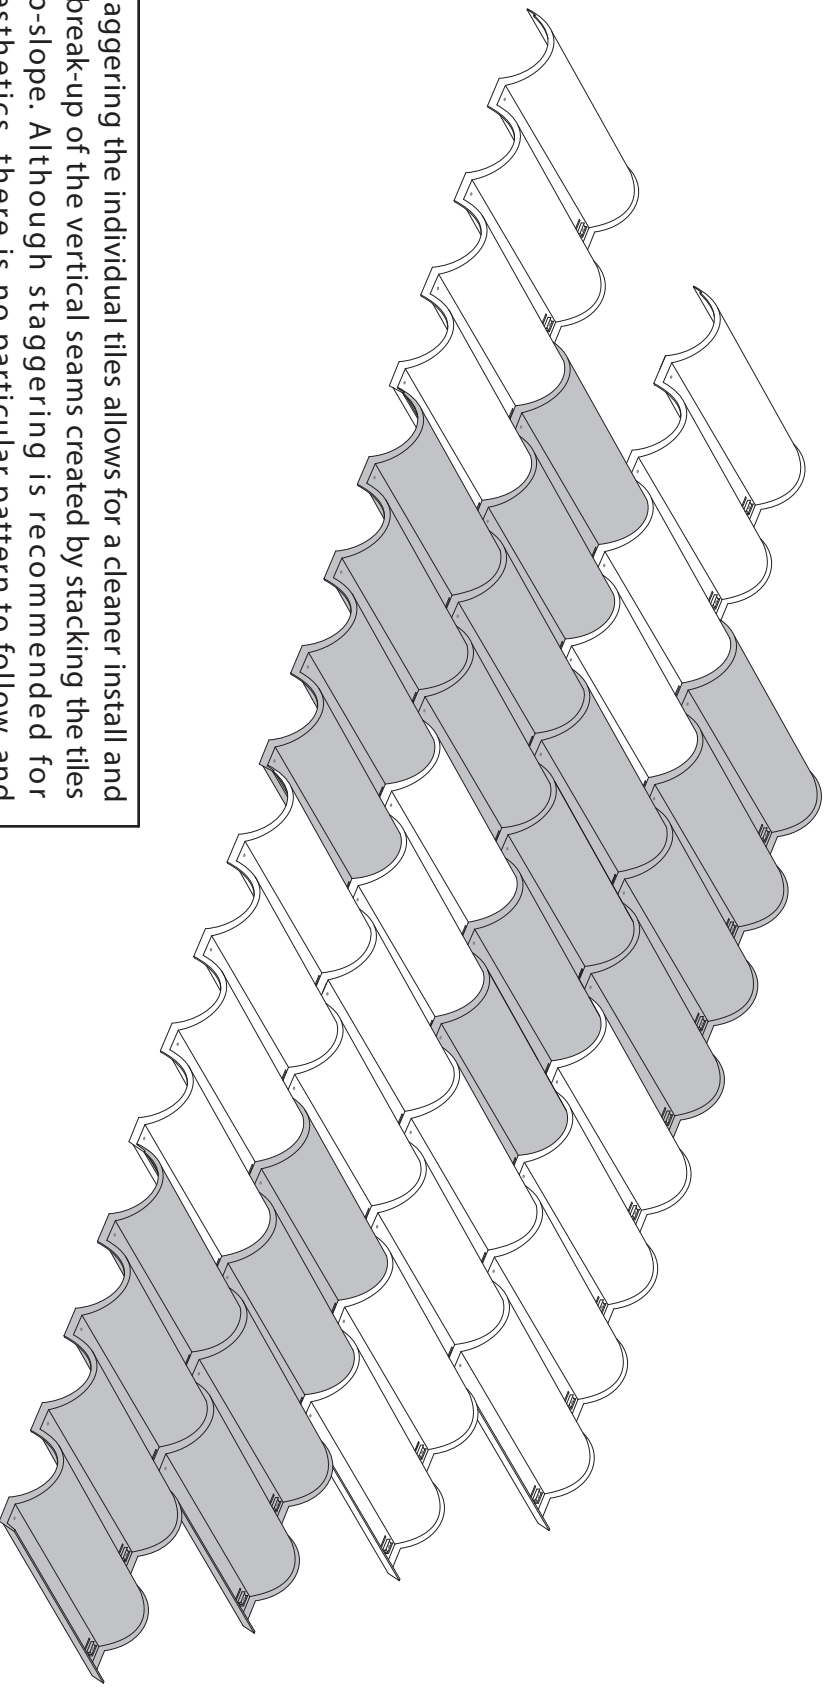

Staggering the individual tiles allows for a cleaner install and a break-up of the vertical seams created by stacking the tiles up-slope. Although staggering is recommended for aesthetics, there is no particular pattern to follow, and staggering is not required; it is up to installer preference.

You may increase the overlap for aesthetics or site conditions, from standard 1.75" up to 4", but be sure to adjust the location of the exposed fastener to always penetrate the screw block on the tile beneath, as shown in pages 4 and 6 of this manual.

drawings not to scale