


Ekorooftile Rake Forming and Installation Detail

In following with Ekorooftile's vision of reducing waste, each rake accessory can be formed from our tiles.

Rather than discarding tiles that have been cut to fit the valleys, hips & details on your roof, they can be used to form rake accessories. This practice not only reduces the amount of material that you must order, but also cuts down on waste going to landfills.


Rakes are also available pre-made.

cut cut cut cut

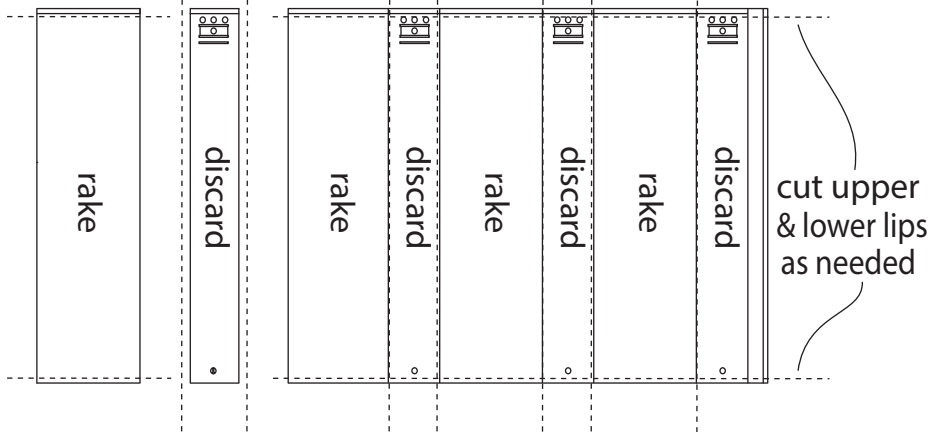


Rake Accessory

Each tile will form four rake accessories





Rake Fastener is #10 2" wood point, Corrosion Resistant & Approved Screw with EPDM washer & Hex or Concealor head, 2" long, fastening the rake to the fascia. Screws should be color-matched to tile for aesthetics.

Concealor / Pancake Head



1/4" Hex Drive

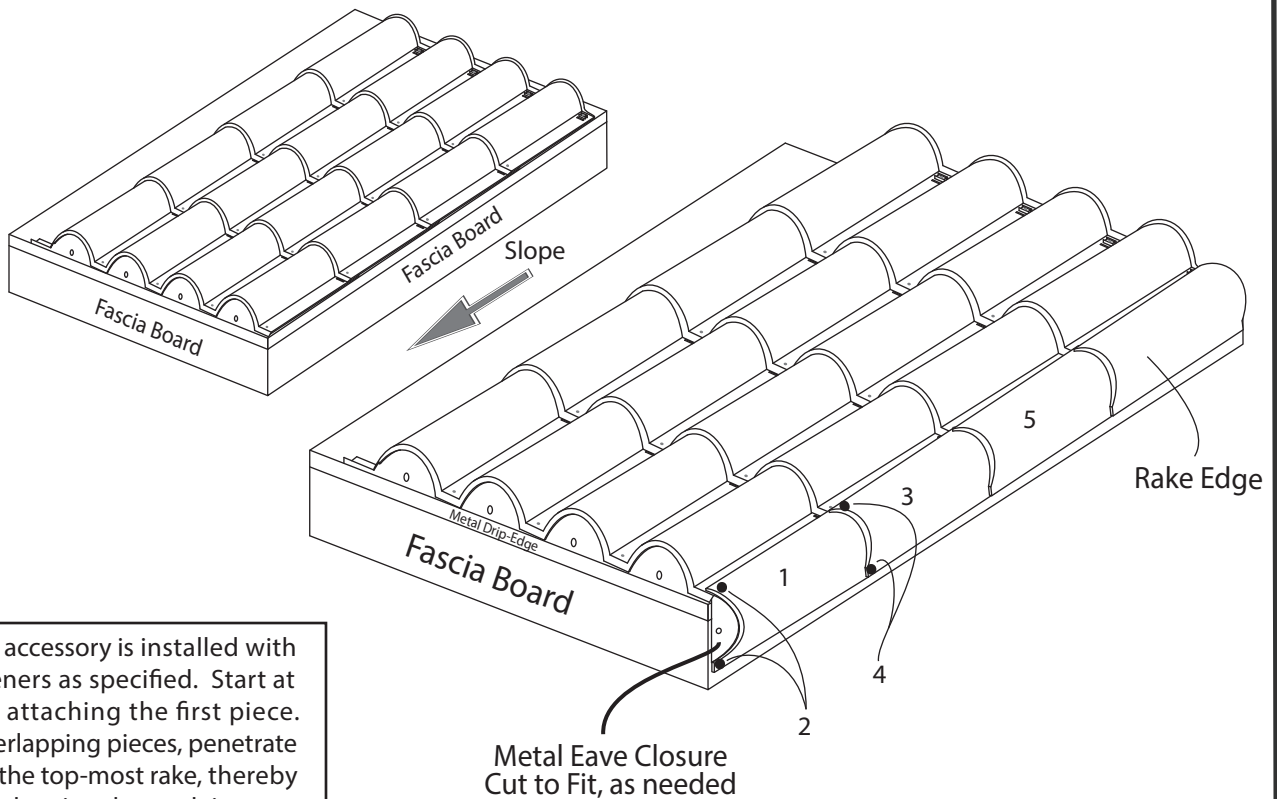


Each rake accessory is installed with four fasteners as specified. Start at the eave, attaching the first piece. When overlapping pieces, penetrate through the top-most rake, thereby attaching the piece beneath it.

Additional fasteners may be used, as needed.


drawings not to scale

Ekorooftile Rake Installation Detail - Without C-Channel

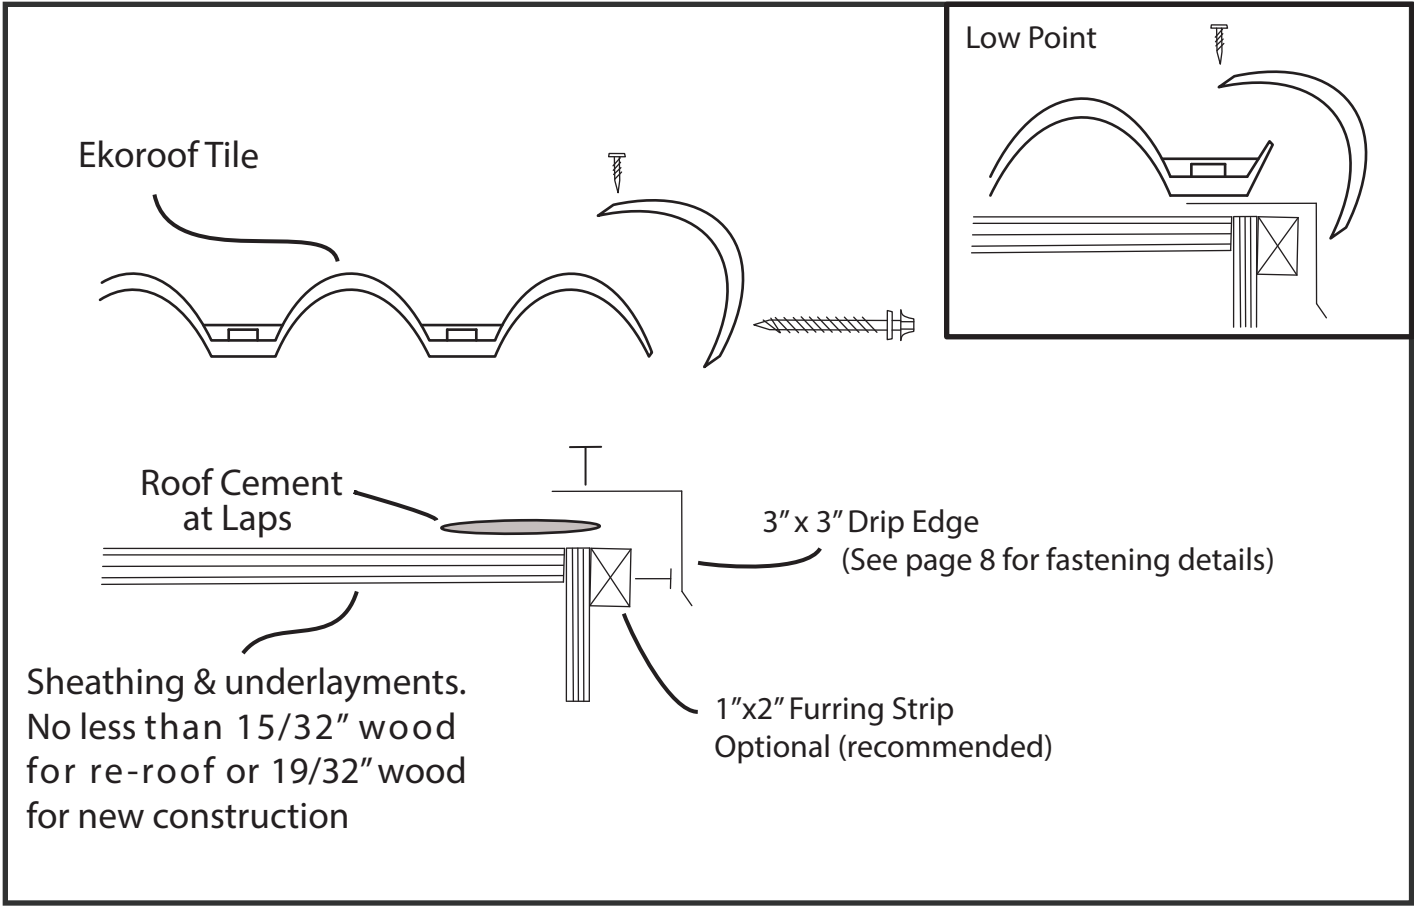

Rake Fastener for attaching the Rake to Ekorooftile or second Rake is #10-13 1" long wood point, Corrosion Resistant & Approved Screw. Rake fastener for attaching the rake to the fascia board is #10 2" long wood point Corrosion Resistant & Approved Screw w/ EPDM washer & Hex or Concealor head, color-matched for aesthetics.

Concealor / Pancake Head



1/4" Hex Drive



#10-13 x 1"

