


# Starter Row Detail



Top View of Tile

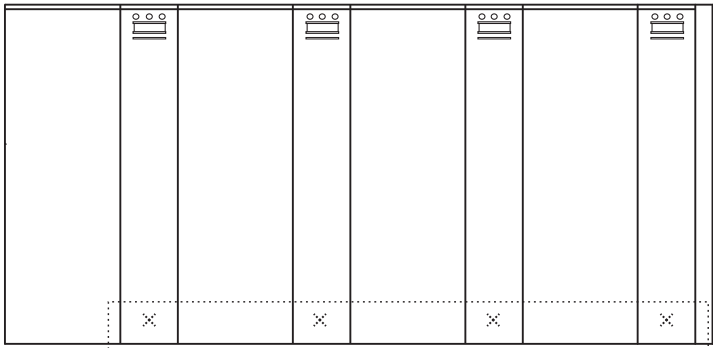

Starter Row Edge Fastener is #10-12 wood point, Corrosion-Resistant Screw with washer, & Hex or Concealor type head, 2" in length.



It is installed 2" up-slope from the eave edge of tile. Exposed fasteners should be color-matched to tile for aesthetics.

See Page 8 for for eave closure installation details.

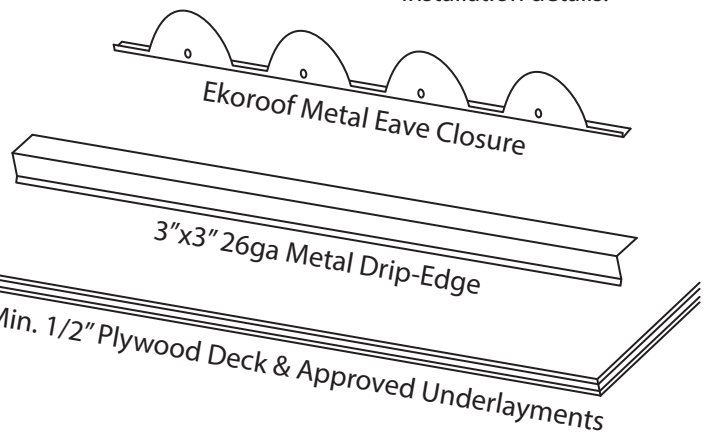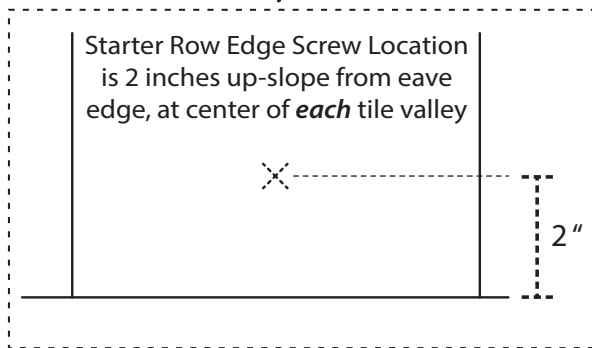


Side View

Installed

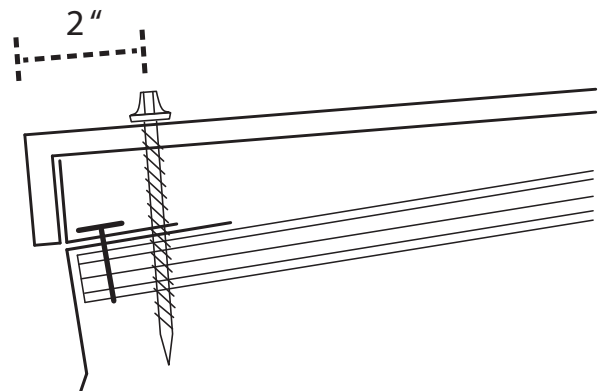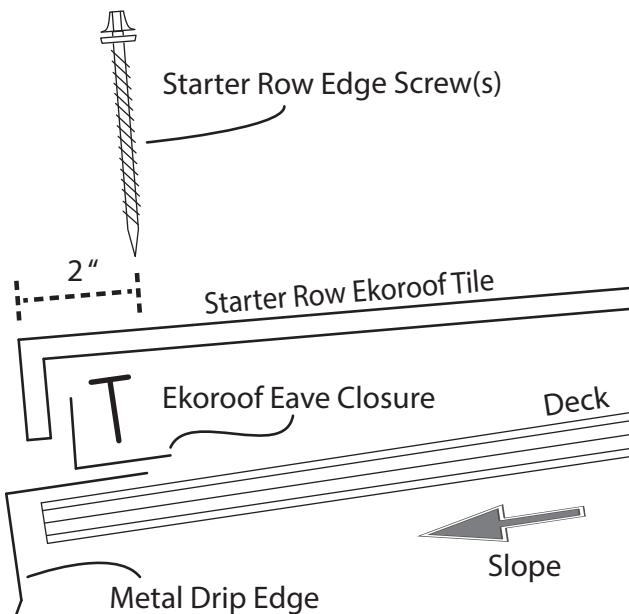


# Ekorooft Tile Attachment Method 1 - 89 PSF

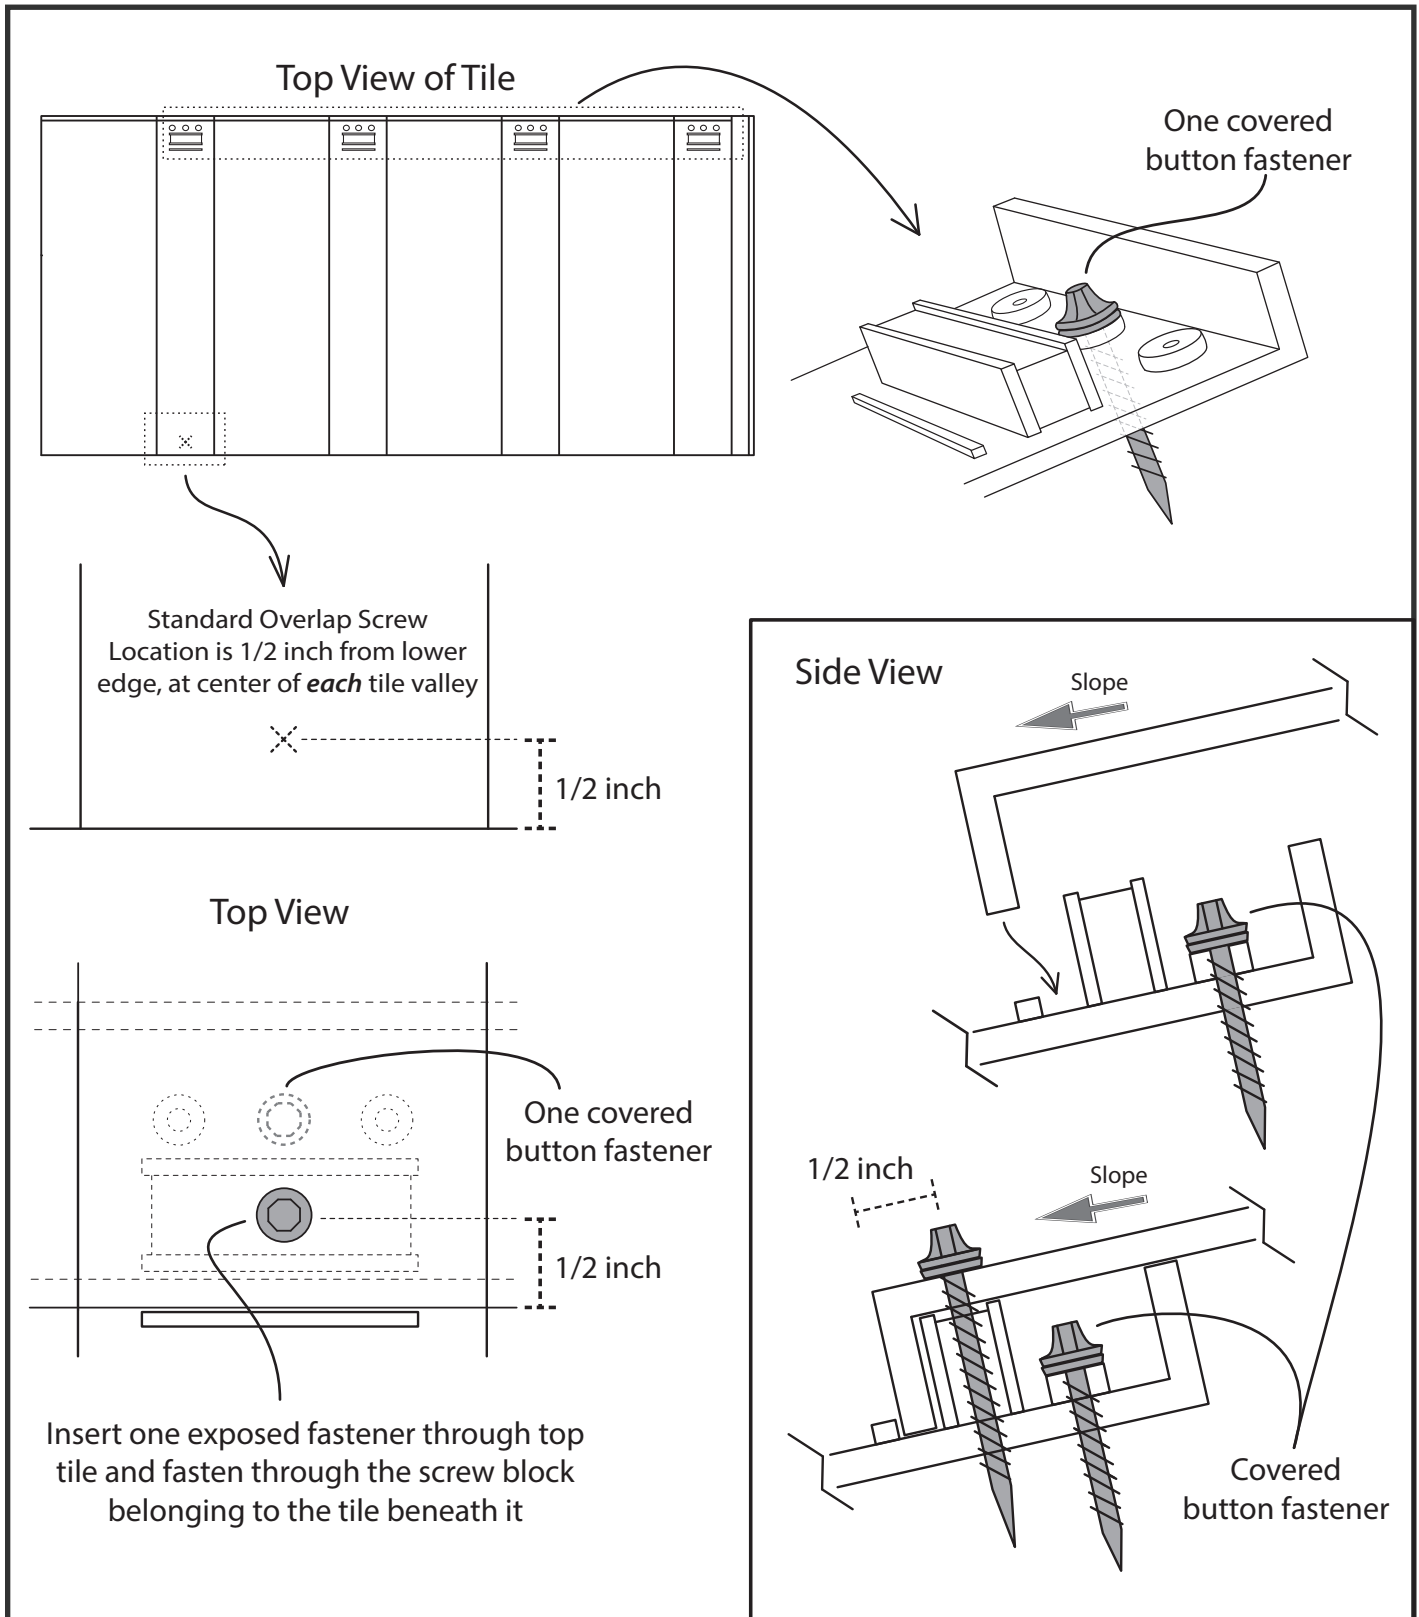


Main Fastener is #10-12 wood point, Corrosion Resistant Screw with washer, & Hex or Concealor head, of sufficient length to penetrate the deck at least 3/16". Contractor must verify on-site to ensure compliance with minimum deck penetration requirement. Exposed fastener should be color-matched to tile for aesthetics.

Concealor / Pancake Head




1/4" Hex Drive




drawings not to scale

# Ekoroof Tile Method 1 Installation Procedures - 86 PSF

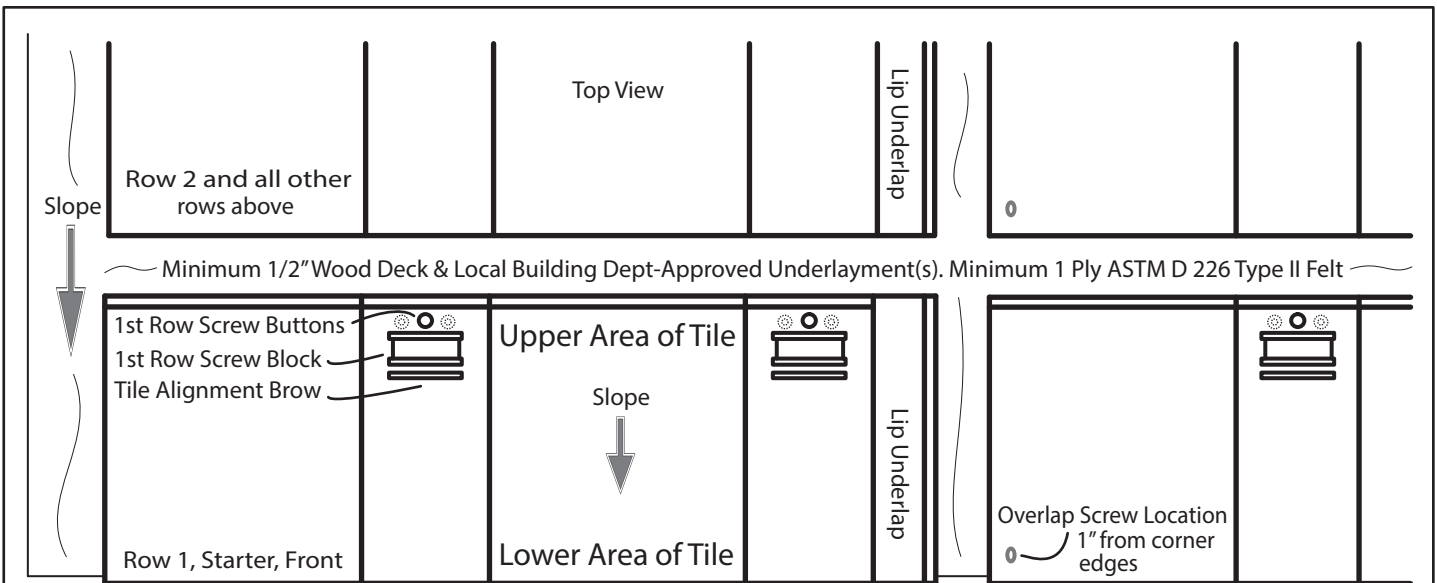


1. Install starter row by fastening tile to deck, using metal eave closures as a guide and utilizing specified screws, penetrating tile and passing 3/16" through deck. Avoid penetrating valleys or flashings when fastening. You may offset fasteners to avoid wood joints, valleys, flashings, drip edge, and eave closure metals or other conditions, as needed by using the additional buttons or flat area of tile at the tile valley. Screws at lower area of tile, at starter row are located 2" higher than the edge of the tile.
2. Overlap subsequent rows using alignment brow as a guide, then fasten as shown below. When using a standard overlap, the exposed fasteners are placed 1/2" from lower edge, as shown in page 4 to penetrate through screw block belonging to tile beneath it, along with underlayments and passing 3/16" through wood deck. You may increase the overlap from the standard 1 3/4" up to 4" for aesthetics or conditions, making sure to adjust the placement of lower area screws to penetrate through screw block of tile beneath it.
3. Use 1" long, #10-13 Concealor or Pancake Head screw for side overlaps. Location of screw is 1" from each corner edge on lower left corner of tile

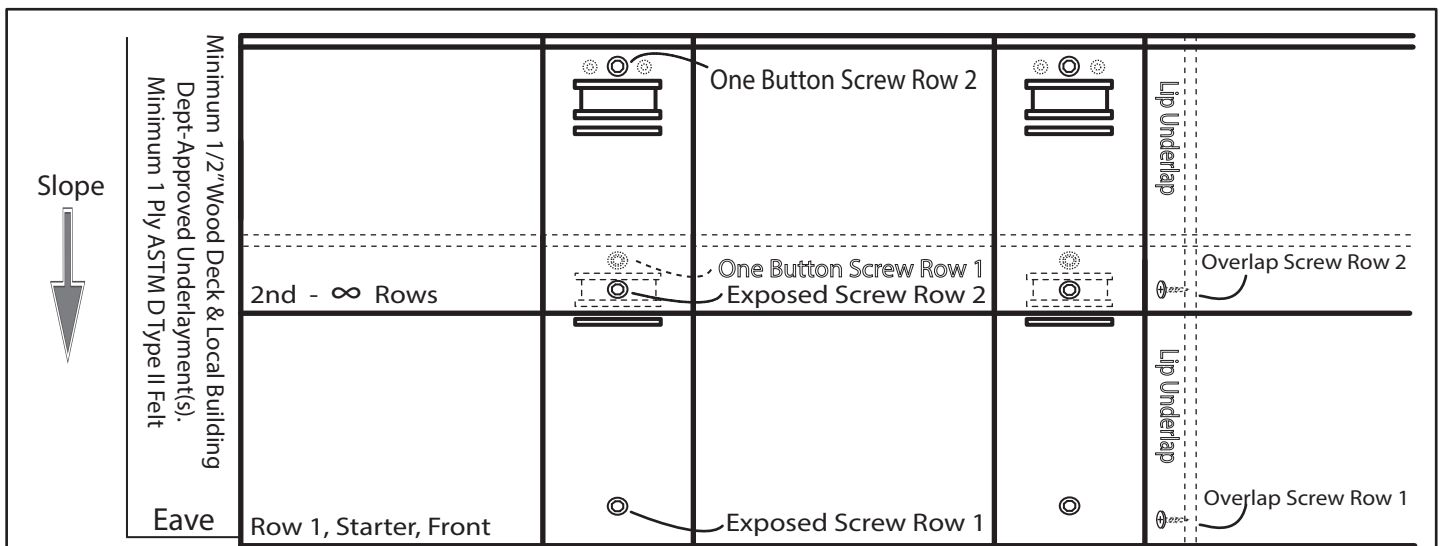


Main Fastener is #10 wood point, Corrosion Resistant & Approved Screw with EPDM washer & Hex or Concealor/Pancake head, of sufficient length to penetrate 3/16" past the deck. Exposed screws should be color-matched to tile for aesthetics.

Side overlap screw is 1" minimum, 1 1/2" maximum, #10-13 Corrosion Resistant & Approved Screw with 1/4" Hex or Concealor/Pancake Head, color-matched to tile for aesthetics.

Concealor / Pancake Head




1/4" Hex Drive




drawings not to scale

# Ekoroof Tile Attachment Method 2 - 146 PSF

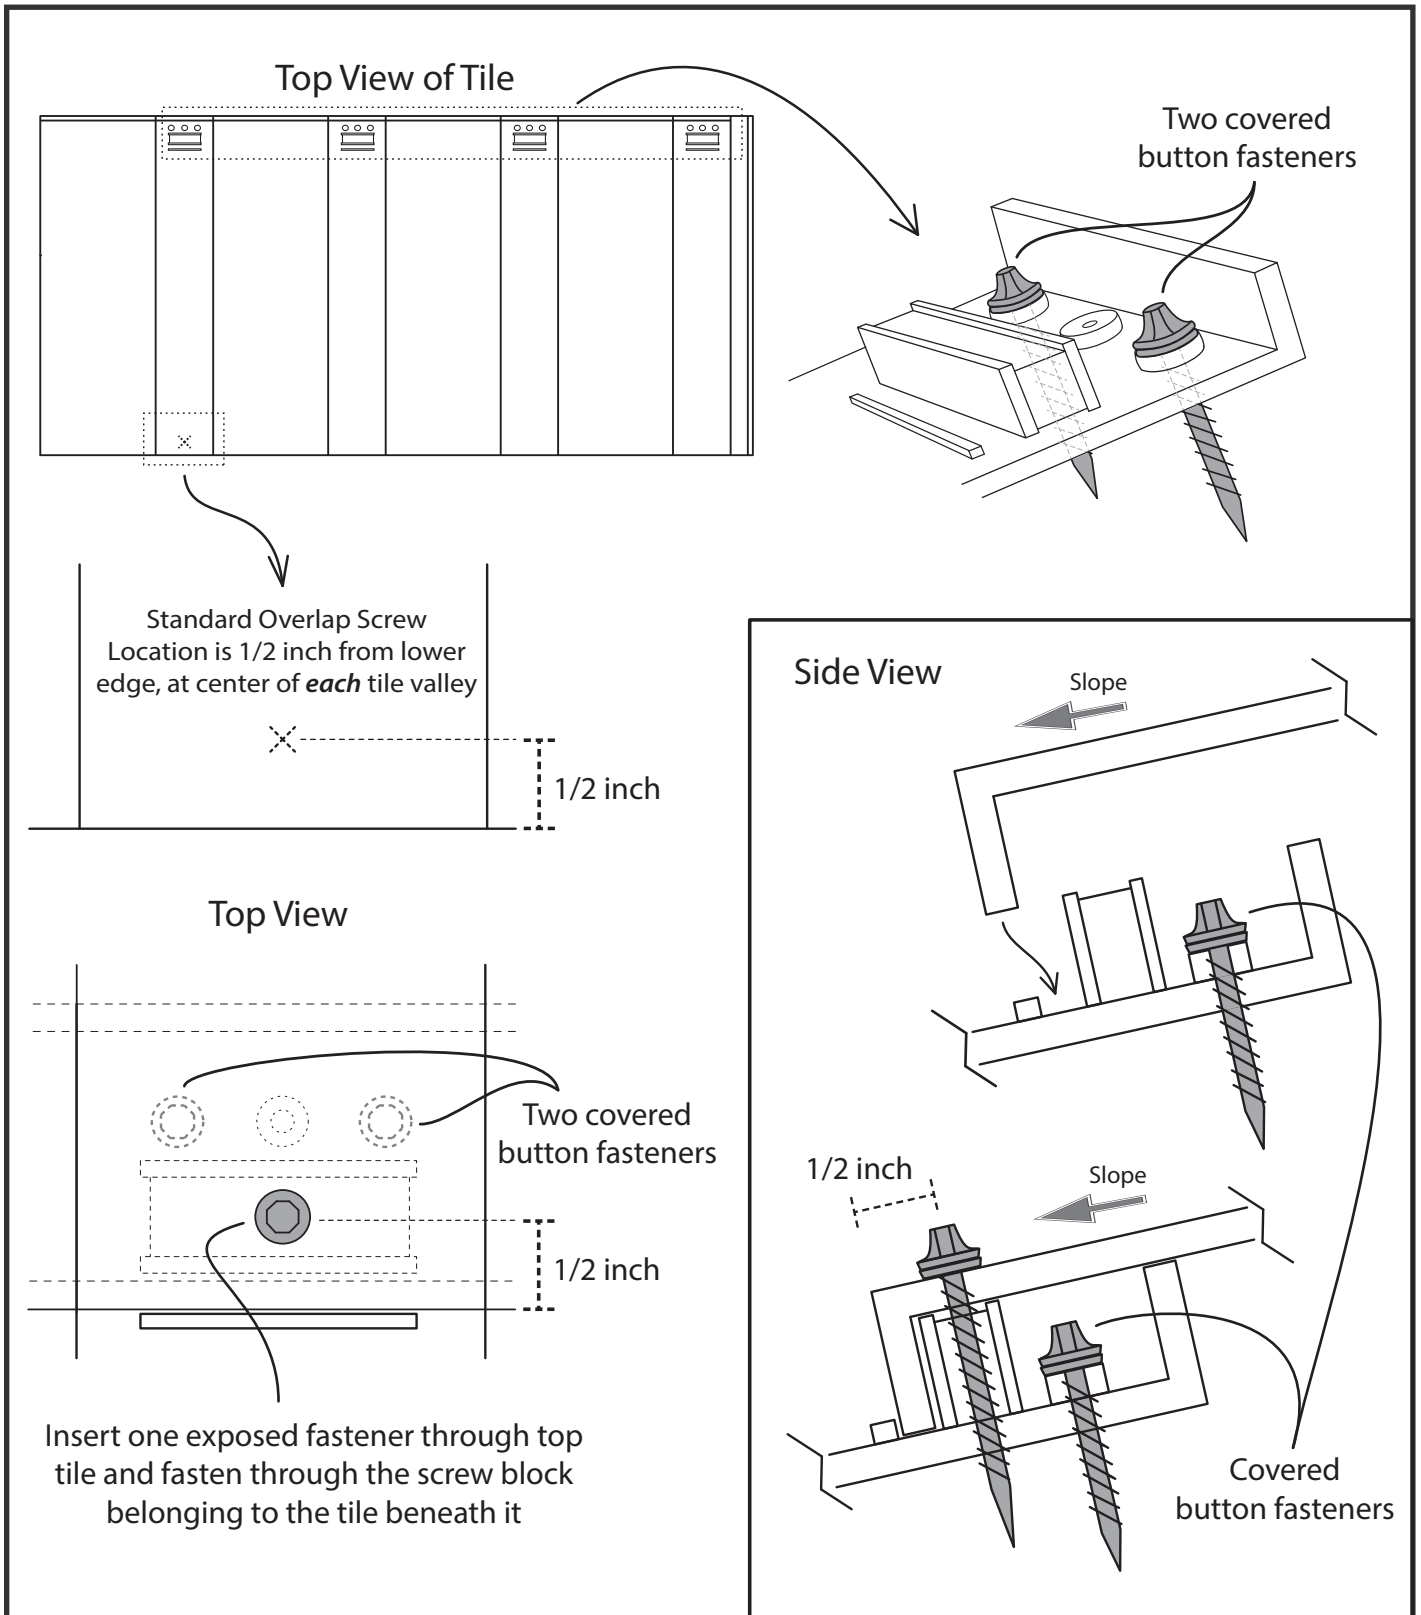


Main Fastener is #10-12 wood point, Corrosion Resistant Screw with washer, & Hex or Concealor head, of sufficient length to penetrate the deck at least 3/16". Contractor must verify on-site to ensure compliance with minimum deck penetration requirement. Exposed fastener should be color-matched to tile for aesthetics.

Concealor / Pancake Head




1/4" Hex Drive




drawings not to scale

# Ekoroof Tile Method 2 Installation Procedures - 131 PSF

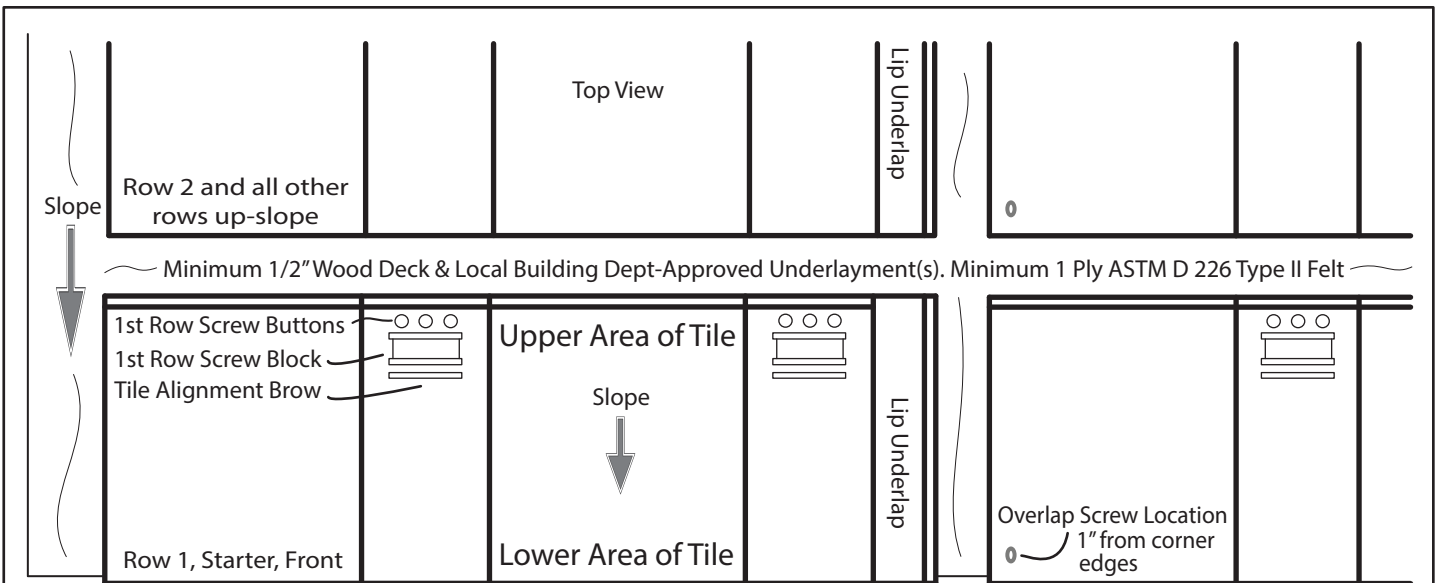


1. Install starter row by fastening tile to deck, using metal eave closures as a guide and utilizing specified screws, penetrating tile and passing 3/16" through deck. Avoid penetrating valleys or flashings when fastening. You may offset fasteners to avoid wood joints, valleys, flashings, drip edge, and eave closure metals or other conditions, as needed by using the additional buttons or flat area of tile at the tile valley. Screws at lower area of tile, at starter row are located 2" higher than the edge of the tile.
2. Overlap subsequent rows using alignment brow as a guide, then fasten as shown below. When using a standard overlap, the exposed fasteners are placed 1/2" from lower edge, as shown in page 6 to penetrate through screw block belonging to tile beneath it, along with underlayments and passing 3/16" through wood deck. You may increase the overlap from the standard 1 3/4" up to 4" for aesthetics or conditions, making sure to adjust the placement of lower area screws to penetrate through screw block of tile beneath it.
3. Use 1" long, #10-13 Concealor or Pancake Head screw for side overlaps. Location of screw is 1" from each corner edge on lower left corner of tile

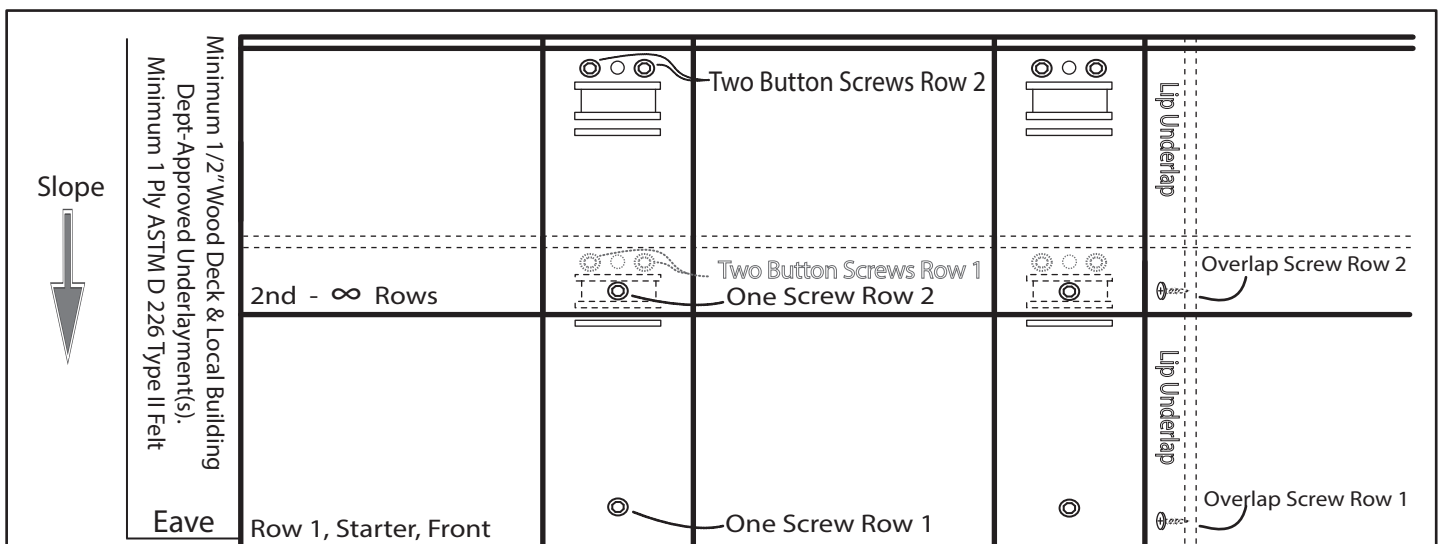


Main Fastener is #10 wood point, Corrosion Resistant & Approved Screw with EPDM washer & Hex or Concealor/Pancake head, of sufficient length to penetrate 3/16" past the deck. Exposed screws should be color-matched to tile for aesthetics.

Side overlap screw is 1" minimum, 1 1/2" maximum, #10-13 Corrosion Resistant & Approved Screw with 1/4" Hex or Concealor/Pancake Head, color-matched to tile for aesthetics.

Concealor / Pancake Head



1/4" Hex Drive



drawings not to scale